

# Analytical Model of Spin-Polarized Semiconductor Lasers

Christian Gøthgen,<sup>1</sup> Rafal Oszwaldowski,<sup>1,2</sup> Athos Petrou,<sup>1</sup> and Igor Žutić<sup>1</sup>

<sup>1</sup> *Department of Physics, State University of New York at Buffalo, NY, 14260, USA*

<sup>2</sup> *Instytut Fizyki, Uniwersytet Mikołaja Kopernika, Grudziądzka 5/7, 87-100, Toruń, Poland*

We formulate an analytical model for vertical-cavity surface-emitting lasers (VCSELs) with injection (pump) of spin-polarized electrons. Our results for two different modes of carrier recombination allow for a systematic analysis of the operational regimes of the spin-VCSELs. We demonstrate that threshold reduction by electrically-pumped spin-polarized carriers can be larger than previously assumed possible. Near the threshold, such VCSELs can act as effective non-linear filters of circularly-polarized light, owing to their spin-dependent gain.

Spin-dependent properties have been successfully used in metallic magnetic multilayers for a variety of device applications exploiting magnetoresistive effects.<sup>1</sup> Unfortunately, much less is known about practical paths to implement spin-controlled devices that would go beyond magnetoresistance.<sup>1,2</sup> One such encouraging development is demonstrated with spin-polarized vertical cavity surface-emitting lasers (spin-VCSELs).<sup>3,4</sup> Spin-polarized carriers created by circularly-polarized photo-excitation or electrical injection can enhance the performance of spin-VCSELs as compared to their conventional (spin-unpolarized) counterparts. This work<sup>3,4</sup> has demonstrated threshold current reduction and independent modulation of optical polarization and intensity. While numerical results using the rate equation (RE) description of spin-VCSELs were already presented,<sup>3,4</sup> a large number of materials parameters makes it difficult to systematically elucidate how the spin-dependent effects modify the device operation. Consequently, even the widely accepted theoretical limit of maximum 50% threshold current reduction needs to be re-examined.

For clarity of our approach we formulate a simple RE<sup>5</sup> model of spin-VCSELs which, while similar to prior numerical work,<sup>3,4</sup> can be solved analytically. We consider a quantum well (QW) as the active region in the VCSEL. Spin-resolved electron and hole densities are  $n_{\pm}$ ,  $p_{\pm}$ , where  $+$ ( $-$ ) denotes the spin up (down) component; the total carrier densities are  $n = n_+ + n_-$ ,  $p = p_+ + p_-$ . Analogously, for photon density we write  $S = S^+ + S^-$ , where  $+$ ( $-$ ) is the right (left) circularly-polarized component.<sup>6</sup> Electrically or optically injected/pumped spin-polarized electrons into the QW can be represented by current density  $J = J_+ + J_-$  (normalized to unit charge and an effective volume in the QW region<sup>4</sup>). Typically, the spin relaxation time of holes is much shorter than for electrons,<sup>1</sup>  $\tau_s^p \ll \tau_s^n$ , implying that the holes can be considered unpolarized with  $p_{\pm} = p/2$ .

In conventional VCSELs, the optical gain term, describing stimulated emission, can be simply modeled as  $g(n, S) = g_0(n - n_{\text{tran}})/(1 + \epsilon S)$ , where  $g_0$  is the density-independent coefficient,<sup>4</sup>  $n_{\text{tran}}$  is the transparency density, and  $\epsilon$  is the gain compression factor. We generalize this relation in the spin-polarized case as  $g(n, S) \rightarrow g_{\pm}(n_{\pm}, p_{\pm}, S^{\pm}) = g_0(n_{\pm} + p_{\pm} - n_{\text{tran}})/(1 + \epsilon S)$ . This form differs from the previously employed gain expressions,<sup>3,4</sup>

as it explicitly contains the hole density, but it coincides with the rigorously derived gain expression from semiconductor Bloch equations.<sup>7</sup>

The charge neutrality  $p_{\pm} = p/2 = n/2$ , allows us to recover the spin-unpolarized limit for the gain expression, as well as to decouple the REs for electrons from those for holes. The spin-polarized REs for electrons thus become

$$dn_{\pm}/dt = J_{\pm} - g_{\pm}(n_{\pm}, S^{\mp})S^{\mp} - (n_{\pm} - n_{\mp})/\tau_s^n - R_{\text{sp}}^{\pm}, \quad (1)$$

$$dS^{\pm}/dt = \Gamma g_{\mp}(n_{\mp}, S^{\pm})S^{\pm} - S^{\pm}/\tau_{\text{ph}} + \beta \Gamma R_{\text{sp}}^{\mp}, \quad (2)$$

where  $\tau_{\text{ph}}$  is the photon lifetime,  $\Gamma$  is the optical confinement coefficient,  $\beta$  is the spontaneous-emission coupling coefficient, and  $R_{\text{sp}}^{\pm}$  is the radiative spontaneous recombination rate. For the spin-unpolarized case,  $R_{\text{sp}}^{\pm}$  is typically assumed to be quadratic in carrier densities,<sup>8</sup>  $R_{\text{sp}} = Bnp/2$ , where  $B$  is a temperature-dependent constant.<sup>7</sup> Another simple form,  $R_{\text{sp}} = n/\tau_r$ , where  $\tau_r$  is the recombination time, is a good approximation at high  $n$ ,<sup>9</sup> but was not considered in the prior work on spin-VCSELs.<sup>3,4</sup> For spin-polarized electrons these forms are generalized as<sup>10</sup>  $R_{\text{sp}}^{\pm} = Bn_{\pm}p_{\pm} = Bn_{\pm}n/2$  and  $R_{\text{sp}}^{\pm} = n_{\pm}/\tau_r$ . We refer to them as quadratic and linear recombination (QR and LR), which can be viewed as the opposite limits of a general expression for  $R_{\text{sp}}^{\pm}(n_{\pm}, p_{\pm})$ .<sup>11</sup>

To describe the solutions of Eqs. (1,2), which are the basis of our theoretical approach, we introduce polarizations of injected electron current  $P_J = (J_+ - J_-)/J$  as well as of electron and photon densities  $P_n = (n_+ - n_-)/n$ ,  $P_S = (S^+ - S^-)/S$ . Electrical injection in QWs, using Fe or FeCo, allows for<sup>1,12</sup>  $|P_n| \sim 0.3 - 0.7$  with similar values for  $|P_J|$ , while  $|P_n| \rightarrow 1$  is attainable optically at room temperature.<sup>1,13</sup> In the unpolarized limit  $J_+ = J_-$ ,  $n_+ = n_-$ ,  $S^+ = S^-$  or  $P_J = P_n = P_S \equiv 0$ . As in the recent experiments,<sup>4</sup> we consider a continuous wave operation of VCSEL and look for steady-state solutions of Eqs. (1,2). Guided by the experimental range<sup>3,4</sup> of  $\beta \sim 10^{-5} - 10^{-3}$ , we mostly focus on the limit  $\beta = 0$ , for which all the operating regimes of spin-VCSELs can be simply described, and, additionally, consider  $\epsilon = 0$ , relevant for moderate pumping intensities.

We first show analytical results for *unpolarized* ( $P_J = 0$ ) VCSEL and LR in the inset of Fig. 1. Injection current density is normalized to the unpolarized threshold value,  $J_T = N_T/\tau_r$ , with  $N_T$  denoting the total electron density at (and above) the threshold,  $N_T = n(J \geq J_T) =$

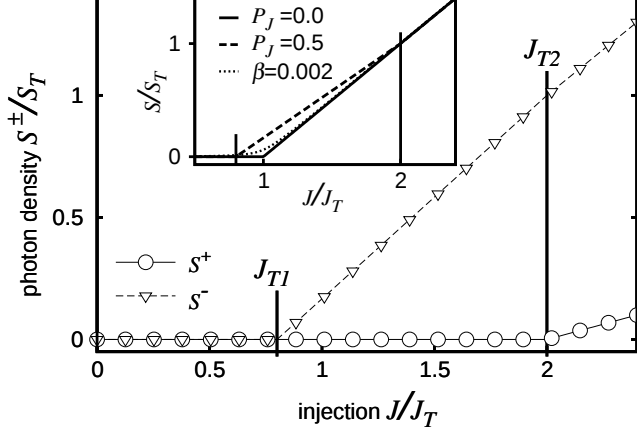


FIG. 1: Photon densities of the left- ( $S^-$ ) and right- ( $S^+$ ) circularly polarized light as a function of electron current  $J$  with polarization  $P_J = 0.5$ , infinite electron spin relaxation time and linear recombination.  $J$  is normalized to the unpolarized threshold current  $J_T$  and  $S^\pm$  to  $S_T = J_T \Gamma \tau_{ph}$ . The vertical lines indicate  $J_{T1}$  and  $J_{T2}$  thresholds. Inset: total photon density ( $S = S^+ + S^-$ ) is shown for spin-unpolarized laser ( $P_J = 0$ ) and two spontaneous-emission coupling coefficients ( $\beta = 0, 0.002$ ), as well as a spin laser with  $P_J = 0.5$ ,  $\beta = 0$ .

$(\Gamma g \tau_{ph})^{-1} + n_{tran}$ , while photon density is normalized to  $S_T = J_T \Gamma \tau_{ph}$ . A small difference in  $S(J)$  between the vanishing (solid line) and finite  $\beta$  (dotted line,  $\beta = 0.002$ ) overestimates the experimental values<sup>3,4</sup> shows the accuracy of  $\beta = 0$  approximation. The unpolarized case has two regimes: for  $J < J_T$  the device behaves as a light-emitting diode (LED), with negligible stimulated emission; for  $J > J_T$ , it is a fully lasing VCSEL.

With finite  $P_J$  and  $\tau_s^n \rightarrow \infty$ , we reveal a more complicated behavior further explored in Fig. 1, main panel. The two threshold currents,  $J_{T1}$  and  $J_{T2}$  ( $J_{T1} \leq J_T \leq J_{T2}$ , the equalities hold only when  $P_J = 0$ ), delimit three regimes of a spin-VCSEL. (i) For  $J < J_{T1}$  it operates as a spin-LED.<sup>1,12</sup> (ii) For  $J_{T1} \leq J_T \leq J_{T2}$ , there is mixed operation: lasing only with left-circularly polarized light  $S^-$  (we assume<sup>13</sup>  $J_+ > J_-$ ), which can be deduced from the spin-dependent gain term in Eqs. (1,2), while  $S^+$  is still in a spin-LED regime ( $S^+ \rightarrow 0$  for  $\beta \rightarrow 0$ ). (iii) For  $J \geq J_{T2}$ , it is fully lasing with both  $S^\pm > 0$ .

RE description of spin-unpolarized lasers reveals that the carrier densities are clamped above  $J_T$ . We have found a related effect in the spin-polarized case. For  $J > J_{T1}$ , Eq. (2) for  $S^-$  can be divided by  $S^-$ , showing that the quantity  $n_+ + p_+ = n_+ + n/2$  (we recall the charge neutrality condition and  $\tau_s^p \rightarrow 0$ ) will be clamped at  $N_T$ . If  $J_{T1} < J < J_{T2}$  then neither  $n_+$  nor  $n_-$  are separately clamped. If  $J > J_{T2}$ , then  $n_- + n/2 = N_T$  must hold in addition to the previous condition  $n_+ + n/2 = N_T$ . These two conditions yield  $n_\pm = N_T/2$ , independent of  $P_J$ . Thus, above  $J_{T2}$ , the sum of Eqs. (2) for  $S^-$  and  $S^+$  reduces to the usual unpolarized equation, and  $S$  is

independent of  $P_J$  (inset of Fig. 1). However, if  $P_J \neq 0$  then we still find  $S^- \neq S^+$  (Fig. 1,  $J > J_T$ ).

Most of the results discussed above do not change qualitatively for a finite  $\tau_s^n$  or QR. The general features, such as the existence of three regimes of operation, remain the same. However, the photon and carrier densities (for a given  $J$ ) as well as the threshold  $J_{T1}$  depend quantitatively on the spin-flip rate and the recombination form. We investigate this dependence in Fig. 2 which shows the evolution of photon and carrier polarizations with the injection current. We consider both LR and QR forms and express our results using the ratio of the radiative recombination and spin relaxation times:  $t = \tau_r/\tau_s^n$ . For QR the unpolarized threshold is  $J_T = BN_T^2/2$ , and we define  $\tau_r = N_T/J_T$  by analogy with the LR case.

When  $0 < J < J_{T1}$ , then  $P_n(J)$  depends on the recombination form;  $P_n$  is constant for LR, while for QR it grows monotonically.<sup>14</sup> Only for a very long spin relaxation time,  $t \rightarrow 0$ ,  $P_n(J < J_{T1}) \rightarrow P_J$ . At  $\beta = 0$  there is no stimulated emission, so that  $P_S \equiv 0$ . When  $J_{T1} < J < J_{T2}$ ,  $P_S = -1$  for any  $t$ , recall Fig. 1. With only a partially polarized electron current, the spin-VCSEL emits fully circularly-polarized light, analogous to the spin-filtering effect in magnetic materials. In the same regime,  $P_n$  decreases with  $J$  because, while  $n_-$  grows,  $n_+$  must drop in order to maintain  $n_+ + n/2 = 3/2n_+ + 1/2n_- = N_T$ .

For  $P_J \neq 0$ , the  $J_{T2} - J_{T1}$  interval is widest for  $\tau_s^n \rightarrow \infty$ . When  $\tau_s^n$  decreases then the lower threshold  $J_{T1}$  grows towards its unpolarized counterpart  $J_T$ , and  $J_{T2} - J_{T1}$  contracts, Fig. 2. We find  $J_{T2} = J_T/(1 - P_J)$ ,

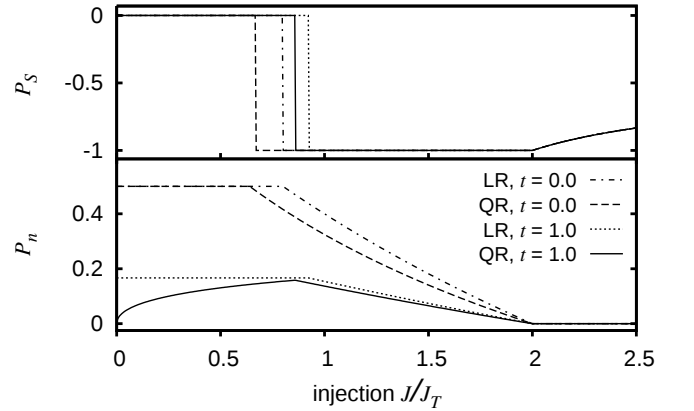


FIG. 2: Electron ( $P_n$ ) and photon ( $P_S$ ) polarizations as a function of injection current  $J$ , with polarization  $P_J = 0.5$  and different ratios of recombination and electron spin relaxation time,  $t$ . Linear (LR) and quadratic (QR) recombination are shown.  $J$  is normalized to the unpolarized threshold  $J_T$ .

independent of  $\tau_s^n$ , this should hold up to very small values of  $\tau_s^n$  ( $t \sim 10^2$ ). In the extreme case of even smaller  $\tau_s^n$ , for  $J_{T1} < J < J_{T2}$  the majority and minority spin densities become almost equal;  $n_+ \gtrsim N_T$  and

$n_- \lesssim N_T$ , so that  $\beta \sim 10^{-4}$  can effectively drive the device to the fully lasing regime. For typical values<sup>3,4</sup> of  $t \sim 5$ , setting  $\beta = 0$  is an accurate assumption. At  $J_{T2}$ , we recall  $n_+ = n_- (= N_T/2)$  so that the spin-flip term in Eq. (1) for  $n_-$  is zero. The equation reduces to  $J_- \equiv 1/2(1 - P_J)J = R_{sp}^-$ , explaining why  $J_{T2}$  depends only on  $P_J$ , but not on  $t$ . For the same reason,  $P_S$  and  $P_n$  are independent of  $t$  when  $J \geq J_{T2}$ . The quantity  $P_S$  increases ( $|P_S|$  decreases) with  $J$  as  $P_S = -P_J J / (J - J_T)$  to the asymptotic value  $P_S = -P_J$ . Thus  $P_J$  can be inferred from  $P_S$  only at sufficiently high injection. In all three regimes, defined by Fig. 1, we find that  $0 \leq P_n < P_J$ , (only for  $\tau_s^n \rightarrow \infty$  and  $J < J_{T1}$ ,  $P_n \rightarrow P_J$ ). For  $J > J_{T2}$  we find  $P_n = 0$ . Therefore  $P_n$  is not enhanced in the spin-VCSEL's active region.

Experiments have demonstrated<sup>3,4</sup> that injecting spin-polarized carriers reduces the threshold current in a VCSEL, i.e.,  $J_{T1}(P_J \neq 0) < J_T$ . We quantify this threshold-current reduction<sup>3,4</sup> with  $R = (J_T - J_{T1})/J_T$ , obtained analytically from REs

$$\text{LR: } R = |P_J| / (2 + |P_J| + 4t), \quad (3)$$

$$\text{QR: } R = 1 - 2 / (2 + |P_J|)^2 \times \left[ 1 + 2|P_J|t + 4t^2 + (1 - 2t) \sqrt{(1 + 2t)^2 + 4|P_J|t} \right], \quad (4)$$

and we find  $R > 0$ , for any  $P_J \neq 0$ ,  $\tau_s^n > 0$  and both LR and QR. As expected,  $R \rightarrow 0$  for  $\tau_s^n \rightarrow 0$  ( $t \rightarrow \infty$ ), independent of the recombination form, since we have always assumed  $\tau_s^p = 0$ . We illustrate further  $R(P_J)$  for both LR and QR in Fig. 3. We choose  $t = 1, 5$ , close to the typical values  $\tau_r \sim 1$  ns and  $\tau_s \sim 100$  ps for QWs at room temperature.<sup>3</sup> From Fig. 3 or Eqs. (3,4) one can see that  $R(P_J, t)$  for LR is always smaller than for QR. For  $|P_J| = 1$  and  $\tau_s^n \rightarrow \infty$  (but still  $\tau_s^p = 0$ ) we obtain the maximum current reductions

$$\text{LR: } R = 1/3, \quad \text{QR: } R = 5/9. \quad (5)$$

Remarkably, for QR the maximum  $R$  is larger than previously assumed possible  $R = 1/2$ ,<sup>3,4</sup> even though holes are completely unpolarized ( $\tau_s^p = 0$ ). This can be explained as follows. First we calculate  $n$  from Eq. (2) for  $S^-$ . The threshold density is reached when  $n_+ + n/2 = N_T$ , which gives  $n = (2/3)N_T$  for  $P_J = 1$ , i.e., for  $n_+ = n$ . Thus the threshold *electron density* is reduced by only  $1/3$ . Assuming  $S^- = 0$  at the threshold, the threshold current from Eq. (1) is given by  $J_+ = Bn_+n/2$ . If  $P_J = 1$  then  $J = J_+ = Bn^2/2 = (2/3)^2 J_T$ , which yields the  $5/9$  *current* reduction, a direct consequence of the quadratic dependence of recombination on  $n$  (note that for LR both the  $N_T$  and  $J_T$  are reduced only by  $1/3$ ).

For comparison, we calculate  $R$  for QR in a priori “ideal” case, where  $n_{\pm} = p_{\pm}$  for any injection  $J$  and

both  $\tau_s^n, \tau_s^p \rightarrow \infty$ . Therefore the gain and QR terms in Eq. (1) for  $n_+$  ( $n_-$ ) and in Eq. (2) for  $S^-$  ( $S^+$ ) must be modified by replacing  $n/2$  with  $n_+$  ( $n_-$ ). Surprisingly, we obtain  $R(|P_J| = 1) = 1/2$ , a smaller reduction

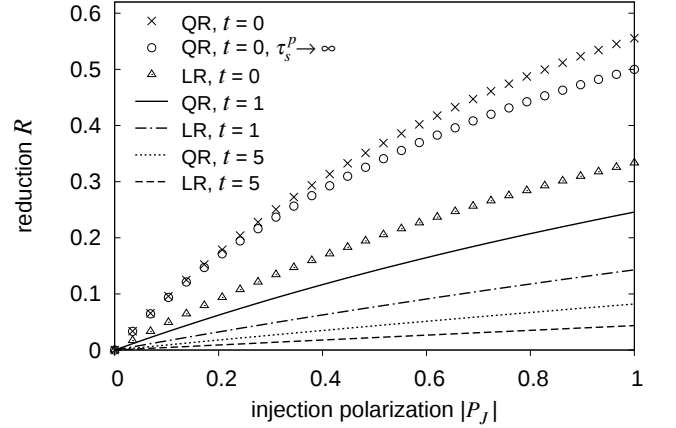


FIG. 3: Threshold current reduction  $R$  as a function of injection polarization  $P_J$ . Shown are both linear and quadratic recombination (LR and QR) for various  $t$ , the ratio of recombination time and electron spin relaxation time. The hole spin relaxation time  $\tau_s^p = 0$ , except for the dashed line and what was previously assumed “ideal” case, in which  $\tau_s^p \rightarrow \infty$ .

than in the case of unpolarized holes. A simple calculation yields  $n = N_T/2$ , i.e., the reduction of the threshold *electron density* is larger than for  $\tau_s^p = 0$ . However, the interband recombination  $R_{sp}^+$  is more efficient, because none of the holes undergo spin-flip. Thus we obtain  $J_+ = J_{T1} = Bn_+^2 = BN_T^2/4 = J_T/2$ . For  $\tau_s^p = 0$  and  $P_J = 1$ , half of the holes are inaccessible for recombination with the fully spin-polarized electrons. This lowers the injection necessary to overcome the recombination losses and the interplay of stimulated and spontaneous recombination leads to a smaller  $R$  in the “ideal” case.

In this work we show that even a simple rate equation model can reveal surprising trends for operation of spin-VCSELs. The maximum threshold current reduction is not achieved for infinite electron and hole spin relaxation times, but rather when the hole spin lifetime vanishes. The corresponding threshold reduction exceeds the previously considered theoretical limit. We expect that the transparency of our analytical approach will help to elucidate the operation of spin-controlled lasers, which continue to be actively studied.<sup>15</sup>

This work was supported by the U.S. ONR and NSF-ECCS Career. We thank M. Holub, M. Oestreich, and G. Strasser for stimulating discussions.

<sup>1</sup> I. Žutić *et al.*, Rev. Mod. Phys. **76**, 323 (2004).

<sup>2</sup> J. Fabian *et al.*, Acta Phys. Slov. **57**, 565 (2007).

- <sup>3</sup> J. Rudolph *et al.*, Appl. Phys. Lett. **82**, 4516 (2003); Appl. Phys. Lett. **87**, 241117 (2005).
- <sup>4</sup> M. Holub *et al.*, Phys. Rev. Lett. **98**, 146603 (2007); J. Phys. D: Appl. Phys. **40**, R179 (2007).
- <sup>5</sup> Generally, REs can provide a versatile description for a variety of lasers, for example, H. Dery and G. Eisenstein, IEEE J. Quant. Electron. **40**, 1398 (2004).
- <sup>6</sup> We use “the angular momentum convention,” described in B. T. Jonker *et al.*, J. Magn. Magn. Matter **277**, 24 (2004).
- <sup>7</sup> W. W. Chow and S. W. Koch, Semiconductor-Laser Fundamentals: Physics of the Gain Materials (Springer, 1999).
- <sup>8</sup> This form is strictly valid if both quasi-Fermi levels are deep in the gap, i.e., below the inversion condition.
- <sup>9</sup> G. Bourdon *et al.*, J. Appl. Phys. **92**, 6595 (2002).
- <sup>10</sup> I. Žutić *et al.*, Phys. Rev. Lett. **97**, 026602 (2006); equilibrium densities are negligibly small for VCSEL operation.
- <sup>11</sup> For the injection levels considered, Auger recombination is not significant.
- <sup>12</sup> A. T. Hanbicki *et al.*, Appl. Phys. Lett. **80**, 1240 (2002); T. J. Zega *et al.*, Phys. Rev. Lett. **96**, 196101 (2006); G. Salis *et al.*, Appl. Phys. Lett. **87**, 262503 (2005).
- <sup>13</sup> We consider  $P_J \geq 0$  while the results for  $P_J < 0$  can be deduced easily. Other approaches were considered for  $P_J \equiv 0$ . M. San Miguel *et al.*, Phys. Rev. A **52**, 1728 (1995).
- <sup>14</sup> Similar behavior is known for bulk-like semiconductors. *Optical Orientation*, edited by F. Meier and B. P. Zakharchenya (North-Holland, New York, 1984); I. Žutić *et al.*, Phys. Rev. B **64**, 121201(R) (2004).
- <sup>15</sup> S. Hövel *et al.*, Appl. Phys. Lett. **92**, 041118 (2008).